

2016 V.6.0

Cooking Equipment (F)

Hot Dog Roller



HD-07S

Model	HD-05S	HD-07S	HD-09S	HD-11S
Description	Hot Dog Roller	Hot Dog Roller	Hot Dog Roller	Hot Dog Roller
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	400	560	720	880
Dimensions (mm)	580x225x225	580x305x225	580x385x225	580x465x225
N.W.(KG)	10	12	15	17
Certificate	CE	CE	CE	CE

Hot Dog Machine



HG06



HG07



HG10



HG11

Model	HG06	HG07	HG10	HG11
Description	Hot Dog Machine	Hot Dog Machine	Hot Dog Machine	Hot Dog Machine
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1000	1100	100	1100
Dimensions (mm)	280x280x350	500x280x350	280x280x320	500x280x350
N.W.(KG)	6.5	10	5	9.7
Certificate	CE	CE	CE	CE

Contact Grill



GH-811







GH-813



GH-811P



GH-813P

Model	GH-811	GH-811P	GH-813	GH-813P
Description	Contact Grill	Contact Grill	Contact Grill	Contact Grill
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1800	2200	3600	2200x2
Dimensions (mm)	390X440X250	450X400X300	570X305X210	840x305x210
N.W.(KG)	16	20	28	39
Certificate	CE	CE	CE	CE
	 A B C	 A B C	 A C D	 A C D E

Contact Griller



Model	CCG-01-1H-TFBF	CCG-01-1H-TRBF	CCG01-1HP
Description	Single Ceramic Contact Griller	Single Ceramic Contact Griller	Single Panini Ceramic Contact Griller
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1600	1600	2920
Dimensions (mm)	340x480x170	340x480x170	590x550x170
N.W.(KG)	10	10.5	11
Certificate	CE	CE	-
			

Toaster



AT-360



AT-370



4ATS



6ATS

Model	AT-360	AT-370	4ATS	6ATS
Description	Toaster	Toaster	Toaster	Toaster
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	3000	1700	2240	3240
Dimensions (mm)	440x280x400	470x250x240	370x210x225	460x210x225
N.W.(KG)	9.8	7.4	5	6
Certificate	CE	CE	CE	CE

Conveyor Toaster



CT-200

Model	CT-100	CT-200	CT-300
Description	Conveyor Toaster	Conveyor Toaster	Conveyor Toaster
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1340	1940	2640
Dimensions (mm)	288x418x387	368x418x387	468x418x387
N.W.(KG)	14	63	20.5
Certificate	CE	CE	CE

Salamander



EB-450



EB-600



AT-936

Model	EB-450	EB-600	EB-800	AT-936
Description	Electric Salamander	Electric Salamander	Electric Salamander	Electric Salamander
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2800	4000	5600	2000
Temperature Range	50-300°C	50-300°C	50-300°C	-
Dimensions (mm)	450x450x500	600x450x500	800x450x500	610x340x280
N.W.(KG)	38.5	49	61	17
Certificate	CE	CE	CE	CE

Popcorn Machine



PC-G1500



PC-G1500R



PCT

Model	PC-G1500	PC-G1500R	PCT
Description	Popcorn Machine	Popcorn Machine	Trolley
Volts	220~240V/50Hz	220~240V/50Hz	—
Power(W)	1500	1500	—
Dimensions (mm)	520x400x670	500x400x700	500x902x920
N.W.(KG)	21.6	44	44
Certificate	CE	CE	—

Popcorn Machine



PPM01-08GB



PPM01-08GR



PPM01-08LR



PPM01-08FC

Model	PPM01-08GB	PPM01-08GR	PPM01-08LR	PPM01-08FC
Description	8 Oz Popcorn Machine	8 Oz Popcorn Machine	8 Oz Popcorn Machine	8 Oz Popcorn Machine
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1400	1300	1300	1300
Dimensions(mm)	500x360x380	500x360x380	560x420x740	560x420x740



PPM01-08CB



PPM01-08DB



PPM01-08GEB



PPM01-08LER

Model	PPM01-08CB	PPM01-08DB	PPM01-08GEB	PPM01-08LER
Description	8 Oz Popcorn Machine	8 Oz Popcorn Machine	8 Oz Popcorn Machine	8 Oz Popcorn Machine
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1300	1300	1300	1300
Dimensions(mm)	560x420x750	590x450x780	500x360x610	560x420x680

Popcorn Machine



PPM01-08GY



PPM01-08LY



FWS03-PC58

Model	PPM01-08GY	PPM01-08LY	FWS03-PC58
Description	8 Oz Popcorn Machine	8 Oz Popcorn Machine	Popcorn Showcase
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1300	1300	780
Dimensions(mm)	560x360x610	560x420x680	580x420x740



PPM01-16LB



PPM01-16FC



PPM01-16DB

Model	PPM01-16LB	PPM01-16FC	PPM01-16DB
Description	16 Oz Popcorn Machine	16 Oz Popcorn Machine	16 Oz Popcorn Machine
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2300	2300	2300
Dimensions(mm)	800x600x1100	800x600x1100	800x600x1100

Crepe Machine



EC 01



EC 02

Model	EC 01	EC 02
Description	Electric Crepe Machine	Electric Crepe Machine
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	3000	6000
Dimensions (mm)	450x485x240	860x485x240
N.W.(KG)	23	42
Certificate	CE	CE

Griddle



EG-250



EG-400GR

Model	EG-250	EG-250GR	EG-400	EG-400GR
Description	Electric Griddle	Electric Griddle	Electric Griddle	Electric Griddle
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1500	1500	3000	3000
Thickness	1.2cm	1.2cm	1.2cm	1.2cm
Plate	Flat	Flat&Grooved	Flat	Flat&Grooved
Dimensions (mm)	250x470x270	250x470x270	400x540x270	400x540x270
N.W.(KG)	16.5	16.5	26.5	26.5
Certificate	CE	CE	CE	CE

Griddle



EG-550GR



EG-730F

Model	EG-550	EG-550GR	EG-550F	EG-730F
Description	Electric Griddle	Electric Griddle	Electric Griddle	Electric Griddle
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	3000	3000	3000	4400
Thickness	1.2cm	1.2cm	1.2cm	1.2cm
Plate	Flat	Flat&Grooved	Flat	Flat
Dimensions (mm)	550x490x270	500x490x270	550x450x230	730x500x230
N.W.(KG)	32	32	23	34
Certificate	CE	CE	CE	CE

Griddle



EGG-730FG

Model	EGG-730FG
Description	Electric Griddle
Volts	220~240V/50Hz
Power(W)	4400
Thickness	1.2cm
Plate	Flat&Grooved
Dimensions (mm)	730x500x230
N.W.(KG)	31.6
Certificate	CE

Rotisserie



ER-45-SA



ER-60-SA



ESWM-9K

Model	ER-45-SA	ER-60-SA	ESWM-9K
Description	Electric Rotisseries	Electric Rotisseries	Electric Shawarma Machine
Volts	220~240V/50Hz	220~240V/50Hz	380~415V/50Hz
Power(W)	4500	6200	9900
Capacity	12 Chickens/ 4 Baskets	16 Chickens/ 4 Baskets	-
Dimensions (mm)	810x670x610	1030x670x810	534X700X1015
N.W.(KG)	65	81	34
Certificate	-	-	CE

Oven



EBO04-1D495



PDO03-1DA

Model	EBO04-1D495	PDO03-1DA
Description	Low Temperature Oven	Electric Pizza Oven
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	1250	2850
Capacity(L)	—	—
Temperature Range	30-120°C	360°C
Timer	—	15Min
Dimensions (mm)	495x690x420	584x635x432

Fryer



Model	GF-4SE/GF-4SC	GF-6SE/GF-6SC	GF-8SE/GF-8SC	GF-11SE/GF-11SC
Description	Electric Single Tank Fryer	Electric Single Tank Fryer	Electric Single Tank Fryer	Electric Single Tank Fryer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2000	2500	3250	3500
Capacity(L)	4	6	8	11
Dimensions (mm)	260x380x310	320X410X285	310X410X340	320X440X340
N.W.(KG)	5	5.5	6	7
Certificate	CE	CE	CE	CE

Remark SE : EGO Thermostat
SC : China Thermostat

Fryer



Model	GF-4TE/GF-4TC	GF-6TE/GF-6TC	GF-8TE/GF-8TC	GF-11TE/GF-11TC
Description	Electric Double Tank Fryer	Electric Double Tank Fryer	Electric Double Tank Fryer	Electric Double Tank Fryer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2000x2	2500x2	3250x2	3500x2
Capacity(L)	4x2	6x2	8x2	11x2
Dimensions (mm)	480X380X310	550X410X285	550X410X340	670X440X340
N.W.(KG)	9.5	12	14	15
Certificate	CE	CE	CE	CE

Remark SE : EGO Thermostat
SC : China Thermostat

Fryer



GF-8FSE/GF-8FSC



GF-8FTE/GF-8FTC

Model	GF-8FSE/GF-8FSC	GF-8FTE/GF-8FTC
Description	Electric Single Tank Fryer with Faucet	Electric Double Tank Fryer with Faucet
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	3250	3250x2
Capacity(L)	8	8x2
DimensionS(mm)	290x550x410	580x550x410
N.W.(KG)	10	17.5
Certificate	CE	CE

Remark SE : EGO Thermostat
SC : China Thermostat

Pasta Cooker



Model	PAK8
Description	Pasta Cooker
Volts	220~240V/50Hz
Power(W)	3400
Capacity(L)	8
Material	Basin #304 Basket #304
Temperature Range	50°C~100°C
Dimensions (mm)	430x320x330
Remark: 1.Micro switch disconnects power 2.When element box is removed	

Pasta Cooker



CE700-101



CE700-102



CE700-102-K

Model	CE700-101	CE700-102	CE700-101-K	CE700-102-K
Description	Pasta Cooker	Pasta Cooker	2 Basket+1/3 GN	4 Basket+1/3 GN
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power	4000W	6000W	3000W	3000W
Temperature Range	50°C~100°C	50°C~100°C	50°C~100°C	50°C~100°C
Dimensions (mm)	415x600x265	590x580x265	415x600x265	590x580x265
N.W.(KG)	11	14.5	11	14.5
Certificate	CE	CE	CE	CE
With Plug	-	-	V	V

Sous Vide Cooking Baths



CE110-100



CE110-102



CE110-103

Model	CE110-100	CE110-101	CE110-102	CE110-103
Description	Sous Vide Cooking Baths	Sous Vide Cooking Baths	Sous Vide Cooking Baths	Sous Vide Cooking Baths
Volts	100~240V/50~60Hz	100~240V/50~60Hz	100~240V/50~60Hz	100~240V/50~60Hz
Power(W)	1000	1000	2000	2000
Maximum Temperature	85°C	85°C	85°C	85°C
Temperature Constant	+/- 0.5°C	+/- 0.5°C	+/- 0.5°C	+/- 0.5°C
Display Resolution	0.1°C	0.1°C	0.1°C	0.1°C
Capacity(L)	8	12	20	26
Internal Dimensions (mm)	327x265x150	327x265x200	530x327x150	530x327x150
Outer Dimensions (mm)	370x305x310	370x305x310	570x370x310	570x370x310
N.W.(KG)	9.8	10.7	15.5	17

Sous Vide Cooking Baths



CE110-104



CE110-105



CE110-106

Model	CE110-104	CE110-105	CE110-106
Description	Sous Vide Cooking Baths	Sous Vide Cooking Baths	Sous Vide Cooking Baths
Volts	100~240V/50~60Hz	100~240V/50~60Hz	100~240V/50~60Hz
Power(W)	2400	2000	4000
Maximum Temperature	85°C	85°C	85°C
Temperature Constant	+/- 0.5°C	+/- 0.5°C	+/- 0.5°C
Display Resolution	0.1°C	0.1°C	0.1°C
Capacity(L)	56	16	40
Internal Dimensions (mm)	654x530x200	327x265x150(x2)	530x327x150(x2)
Outer Dimensions (mm)	694x673x310	585x370x310	715x570x310
N.W.(KG)	27	16.5	29

Digital Sous vide



CE160-100



CE160-101

- $\pm 1^{\circ}\text{C}$
- Digital Control

Model	CE160-100	CE160-101
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	2000	2000
Capacity(L)	16	25
Working Time(H)	0~99	0~99
Working Temperature ($^{\circ}\text{C}$)	30~90	30~90
Dimensions (mm)	370x340x270	540x340x270
N.W.(KG)	9.2	-
Certificate	CE	CE
Remark: 1)5 Preset Memories,And With Individual Time Set And Temperature Setting 2)Drain Facet With Hose Tube Attachment 3)All Stainless Steel Body And Stainless Steel Lid 4)Automatic Warm Water Circulation System 5)Protection Against Dry Running And For Over-heating 6)Stainless Steel Wire Racks Available For Vagged Food Positioning In The Bowl		

Sous Vide



Model	CE180-100
Volts	220~240V/50Hz
Power	1300W

- Blue background light screen display with °C&°F readouts;
- User-adjustable temperature calibration;
- All stainless steel(wetted parts)
- Easy disassembly for cleaning
- Temperature accuracy: +/- 0.5°C

Microwave Oven



MWO01-2510



MWO01-2510D

Model	MWO01-2510	MWO01-2510D
Description	Microwave Oven	Microwave Oven
Feature	Touch Control	Digital Control
Timer	0:00~6:00	0:15~6:00
Volts	120~240V/50~60Hz	120~240V/50~60Hz
Power(W)	1000	1000
Material	Stainless Steel	Stainless Steel
Capacity(L)	25	25
Dimensions (mm)	579x460x362	579x460x362
N.W.(KG)	14.6	14.6
Certificate		

Microwave Oven



Model	MWO01-3411	MWO01-3418	MWO01-3421
Description	Microwave Oven	Microwave Oven	Microwave Oven
Feature	Touch Control	Touch Control	Touch Control
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1000	1800	2100
Material	Stainless Steel	Stainless Steel	Stainless Steel
Capacity(L)	34	34	34
Dimensions (mm)	574.2x526.4x367.5	574.2x526.4x367.5	574.2x526.4x367.5
N.W.(KG)	32	32	32
Certificate			

Microwave Oven



MWO01-2510KM



MWO01-2510DKM

Model	MWO01-2510KM	MWO01-2510DKM
Description	Microwave Oven	Microwave Oven
Feature	Touch Control	Knob Control
Timer	0:00~6:00	0:15~6:00
Volts	120~240V/50~60Hz	120~240V/50~60Hz
Power(W)	1000	1000
Material	Stainless Steel	Stainless Steel
Capacity(L)	25	25
Dimensions (mm)	579x460x362	579x460x362
N.W.(KG)	14.6	14.6
Certificate		

Microwave Oven



MWO01-2510R



MWO01-2510W

Model	MWO01-2510R	MWO01-2510W
Description	Microwave Oven	Microwave Oven
Feature	Knob & Touch Controls	Knob & Touch Controls
Volts	120~240V/50~60Hz	120~240V/50~60Hz
Power(W)	1000	1000
Material	Stainless Steel	Stainless Steel
Capacity(L)	25	25
Dimensions (mm)	579x460x362	579x460x362
N.W.(KG)	14.6	14.6
Certificate		

Microwave Oven



Model	MWO01-3411KM	MWO01-3418KM	MWO01-3421KM
Description	Microwave Oven	Microwave Oven	Microwave Oven
Feature	Touch Control	Touch Control	Touch Control
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1000	1800	2100
Material	Stainless Steel	Stainless Steel	Stainless Steel
Capacity(L)	34	34	34
Dimensions (mm)	574.2x526.4x367.5	574.2x526.4x367.5	574.2x526.4x367.5
N.W.(KG)	32	32	32
Certificate	UL ETL GS	UL ETL GS	UL ETL GS

Microwave Oven



- One magnetron
- 34L Oven Capacity
- Motor driven double rotating antenna
- 100 Programmable menu settings
- 5 Microwave power levels

Model	CE400-103
Description	Microwave Oven
Feature	Touch Control
Volts	220~240V/50Hz
Power(W)	1000
Material	Stainless Steel
Dimensions(mm)	574.2x526.4x367.5
N.W.(KG)	32
Certificate	

Microwave Oven



USB, for update menu purpose

- 17L Oven Capacity
- Stainless steel cabinet
- Motor driven double rotating antenna
- 100 Programmable menu settings
- 5 Microwave power levels

Model	CE400-104	CE400-105	CE400-106
Magnetron	One	Two	Two
Feature	Touch Control	Touch Control	Touch Control
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	1800	2100
Material	Stainless Steel	Stainless Steel	Stainless Steel
Packing Size (mm)	507x640x416	507x640x416	507x640x416
Certificate	ETL GS	ETL GS	ETL GS

Microwave Oven



P100M25ASL-5S



P100M25BSL-5S



P180M30ASL-YL

Model	P100M25ASL-5S	P100M25BSL-5S	P180M30ASL-YL
Description	Microwave Oven	Microwave Oven	Microwave Oven
Feature	Touch Control	Digital Control	Touch Control
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1000	1000	1800
Material	Stainless Steel	Stainless Steel	Stainless Steel
Capacity(L)	25	25	30
Dimensions (mm)	520x442x312	520x442x312	490x644x405
N.W.(KG)	18	18	34
Certificate	CE UL ETL GS	CE UL ETL GS	CE

Induction Cooker

IC-270B-BT



IC-350B-BT



IDC-WB3100



IC-800A



Model	IC-270B-BT	IC-350B-BT	IDC-WB3100	IC-800A
Description	Induction Cooker	Induction Cooker	Induction Cooker	Induction Cooker
Feature	LCD Display	LCD Display	LCD Display	Konb Control
Electronic Overheating Protection	V	V	V	V
Volts	220~240V/ 50~60Hz	220~240V/50Hz	220~240V/50Hz	380~400V/50Hz
Power(W)	500-2700	500-3500	500-3100	500-8000
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	60-240°C	60-240°C	60-240°C	-
Dimensions (mm)	300x370x100	340x445x115	352x407x115	540x500x180
Timer	0-180min	0-180min	0-180min	-
Certificate	CE	CE	CE	CE

Induction Cooker

IC-35E



IC-35D



IC-350KC



IC-350KC-1



Model	IC-35E	IC-35D	IC-350KC	IC-350KC-1
Description	Induction Cooker	Induction Cooker	Induction Cooker	Induction Cooker
Feature	Touch Control LCD Display	Touch Control LCD Display	LCD Display	LCD Display
Electronic Overheating Protection	V	V	V	V
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	500-3500	500-3500	500-3500	500-3500
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	60-240°C	60-240°C	60-240°C	60-240°C
Dimensions (mm)	338x395x120	340x440x117	340X440X117	340X440X117
Timer	0-180min	0-180min	0-180min	0-180min
Certificate	CE	CE	CE	CE

Induction Cooker



IT 29



IT 28



EIT2

Model	IT 29	IT 28	EIT2
Description	Induction Cooker	Induction Cooker	Induction Cooker
Feature	Touch Control LED Display	Touch Control LED Display	Touch Control LED Display
Electronic Overheating Protection	V	V	V
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	500-2700	500-2700	500-2000
Material	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	60-240°C	60-240°C	60-240°C
Dimensions (mm)	320x368x106	337x425x75	310x380x53
Timer	0-180min	0-180min	0-180min
Certificate	In Process	In Process	CE

Induction Cooker



IC-350A3



IC-350K1



IC-350K

Model	IC-350A3	IC-350K1	IC-350K
Description	Induction Cooker	Induction Cooker	Induction Cooker
Feature	Konb Control	Konb Control	LED Display
Electronic Overheating Protection	V	V	V
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	500-3500	500-3500	500-3500
Material	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	-	-	60-240°C
Dimensions (mm)	340x445x117	327x420x98	340x440x117
Timer	-	-	0-180min
Certificate	CE	CE	CE

Induction Fryer



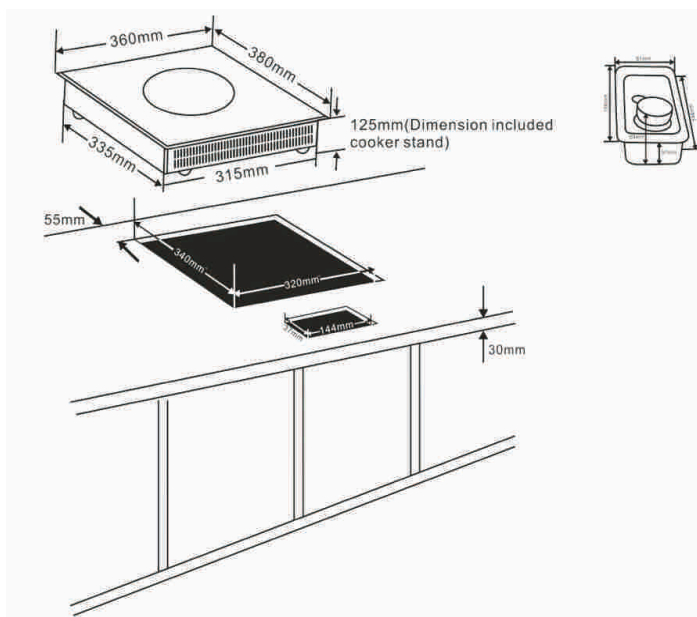
Model	CE500-103
Description	Induction Fryer
Feature	LED Display
Capacity(L)	8
Timer	V
Volts	220~240V/50Hz
Power(W)	3500
Material	Stainless Steel
Temperature Range	150-190°C
Dimensions(mm)	327x572x505
Certificate	CE

Induction Cooker

IC-350T



IC-350T-2



Model	IC-350T	IC-350T-2
Description	Induction Cooker	Induction Cooker
Feature	Touch and Knob Control	Touch and Knob Control
Electronic Overheating Protection	V	V
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	500-3500	500-3500
Material	Stainless Steel	Stainless Steel
Temperature Range	60-240°C	60-240°C
Dimensions (mm)	360x380x125	360x380x125
Certificate	CE	CE

Induction Cooker



IC-250WP



IC-500WP



IWOK99

Model	IC-100WP	IC-250WP	IC-500WP	IWOK99
Description	Induction Cooker	Induction Cooker	Induction Cooker	Wok Pan
Feature	Konb Control	Konb Control	Konb Control	
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	
Power(W)	100	250	500	
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel Interlayer Aluminum
Temperature Range	60-105°C	60-105°C	90°C	
Dimensions (mm)	457x272x43	610x375x43	Φ138x110	Φ360
Certificate	CE	CE	CE	

Rice Cooker



HJF-8155

Model	HJF-8155	HJF-8195
Description	Stainless Steel Rice Cooker	Stainless Steel Rice Cooker
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	1550	1950
Capacity(L)	4	5.4
Dimensions (mm)	455x455x370	455x455x370
N.W.(KG)	9.3	9.3
Certificate	CE	CE

Rice Cooker



CE100-100

Model	CE100-100
Description	Stainless Steel Rice Cooker
Volts	220~240V/50Hz
Power(W)	2600
Capacity(L)	8.2
Dimensions (mm)	548x480x410
Certificate	CE